

**INFINTI** 極限

**CHALLENGER**


**FY-3278A<sup>+</sup>**

550 dpi

4 COLORS

50 Pico Liter  
皮升

## High Speed Solvent Printer

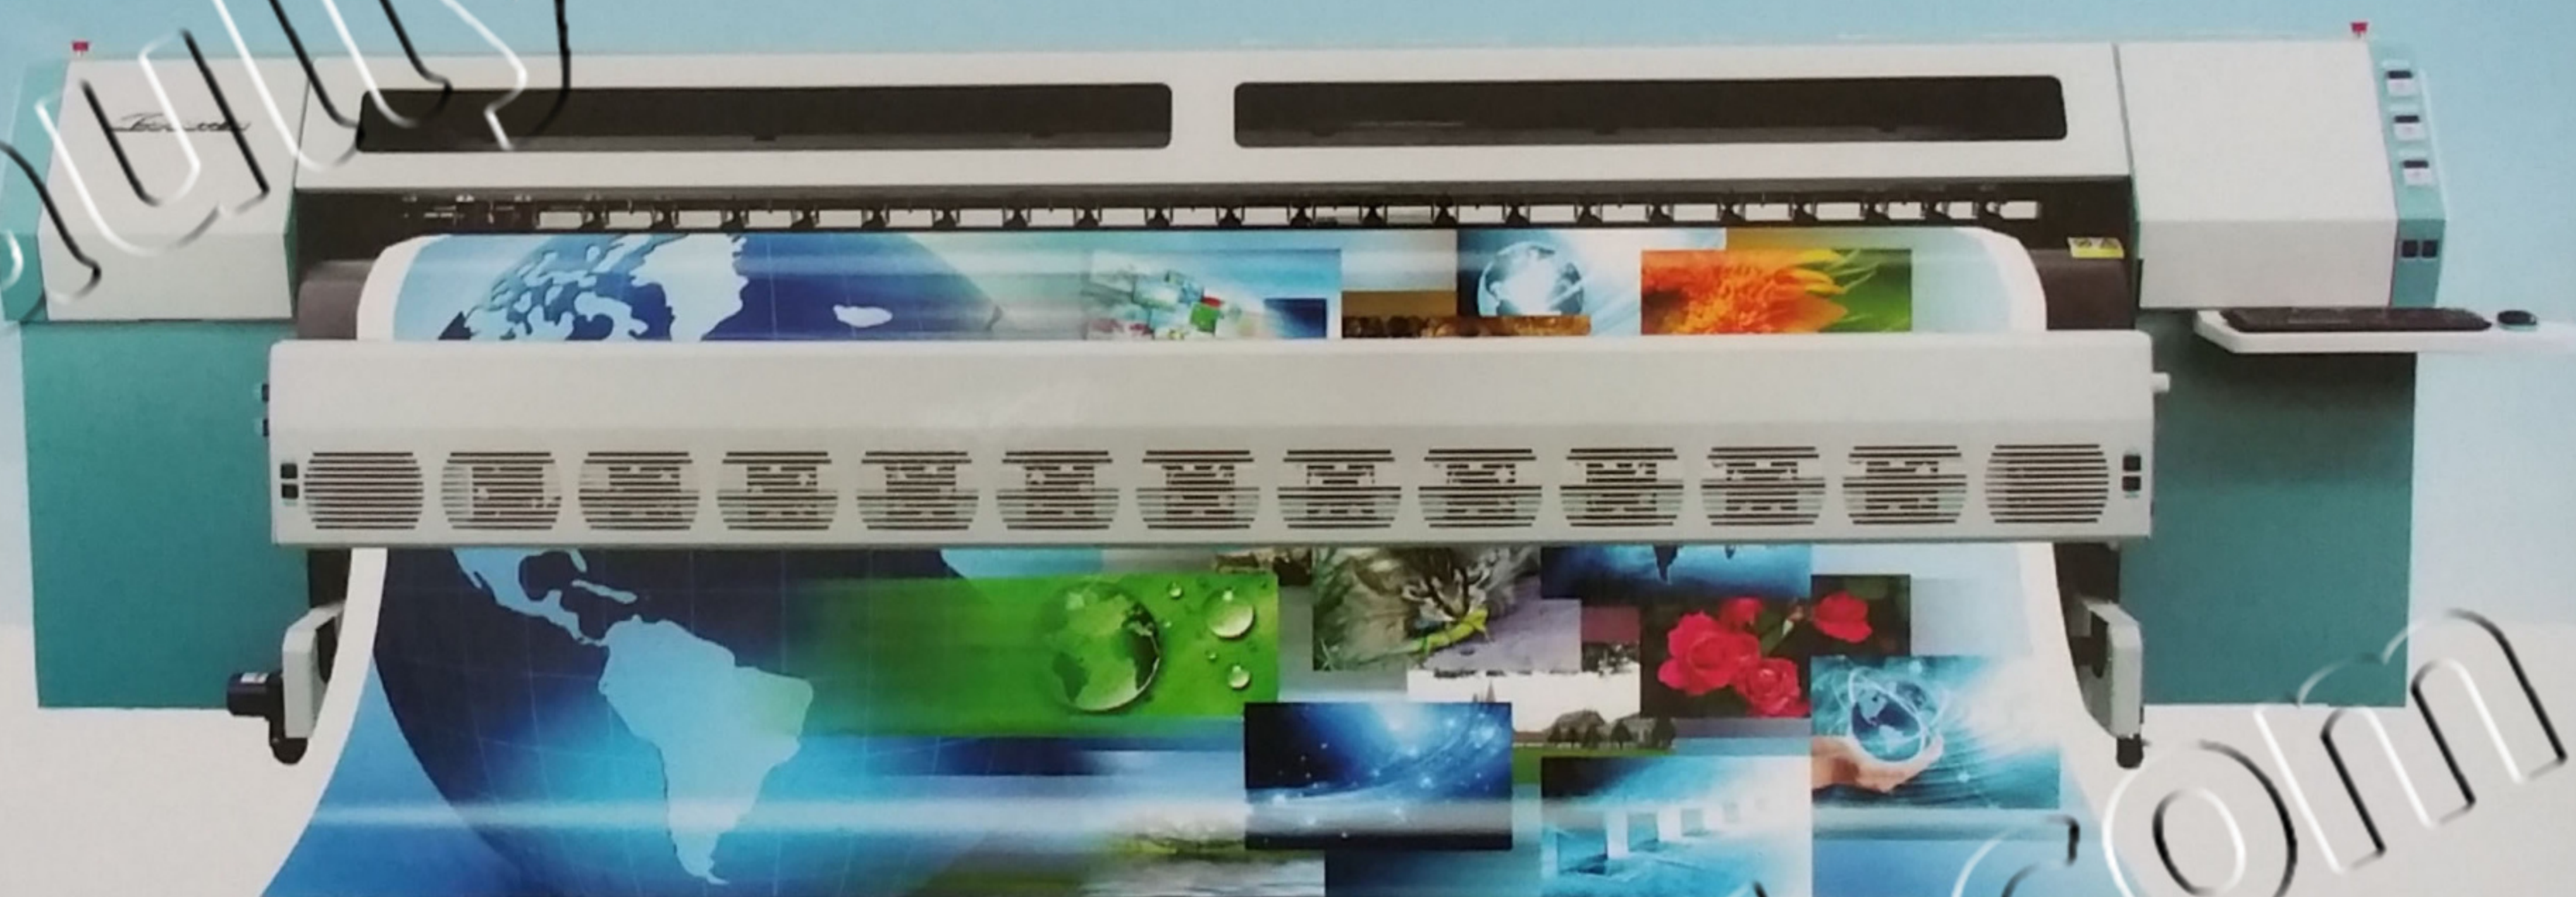

**LIMO  
JET**

### Solution to High Speed Printing

Double 4 color with high color saturation printing technology,

Maximum Speed up to **161.35** m<sup>2</sup>/h.

 **飛陽聯合**  
FEI YEUNG UNION


Skype: Aullyxie ( aully@hotmail.com )  
[www.facebook.com/SolventPrinter](http://www.facebook.com/SolventPrinter)

## Technical Specifications

Model		FY-3278A+	FY-3208A+
Printhead		Drop on demand Piezo Head	
Number of Printhead		8 SPT510-50PL	8 SPT510-35PL
Maximum Resolution		240X720DPI	720X720DPI
Maximum Print Width		3200mm(125.98" )	
Print Speed*	Draft	161m <sup>2</sup> /hr	112m <sup>2</sup> /hr
	Standard	114m <sup>2</sup> /hr	82m <sup>2</sup> /hr
	Quality	91m <sup>2</sup> /hr	74m <sup>2</sup> /hr
	High Quality	71m <sup>2</sup> /hr	53m <sup>2</sup> /hr
Media	Max. width	3,300mm	
	Type	Frontlit, Backlit, Vinyl, Polyester, Window Film, Leather...	
Heating System		3 way intelligent heater	
Ink	Type	Solvent , Eco Solvent	
	Capacity	1L or 5L per color Main Tank	
Auto Cleaning System		Positive Pressure Cleaning, LED lighting Semi Auto-Capping	
Print Interface		USB 2.0	
RIP Software		Maintop, Ultraprint, Photoprint, ONYX	
Power Specification	Printer	AC 220V 50HZ 3A 660W	
	Heater	AC 220V 50HZ 9A 1980W	
	Drying	AC 220V 50HZ 9A 1980W	
Operation Environment	Temperature	Working : 15°C-30°C (Recommend : 20°C-28°C)	
	Humidity	Working : 20%-80% (Recommend : 40%-60%)	
Dimension & Weight	Machine	L4576 x W1057 x H1300mm 670kg	
	Package	L4700 x W1130 x H1445mm 890kg	

\* The speed data are taken from the printer at fast speed. Product specifications are subject to change without notice in advance; Computer and monitor not included; For more information, please contact your local dealer or visit [www.fyunion.com](http://www.fyunion.com); All rights reserved.


## Features

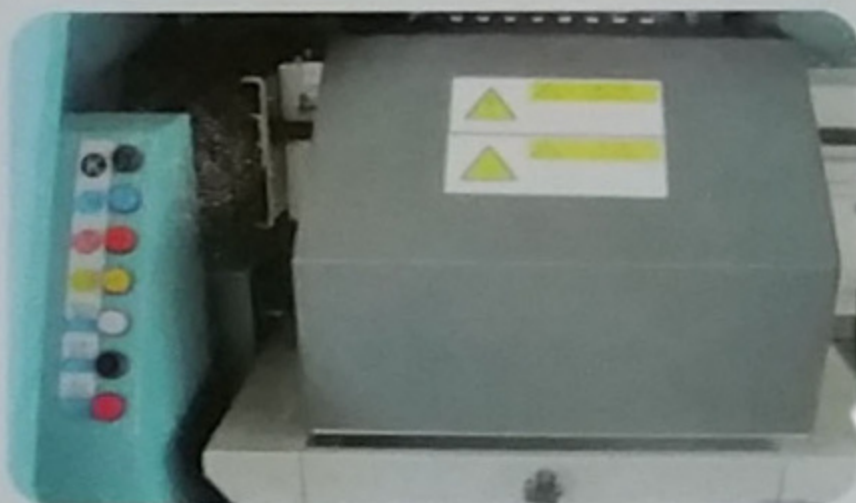

Individual color purging system minimizes waste of ink;



Industrial printhead with long life span and high production;

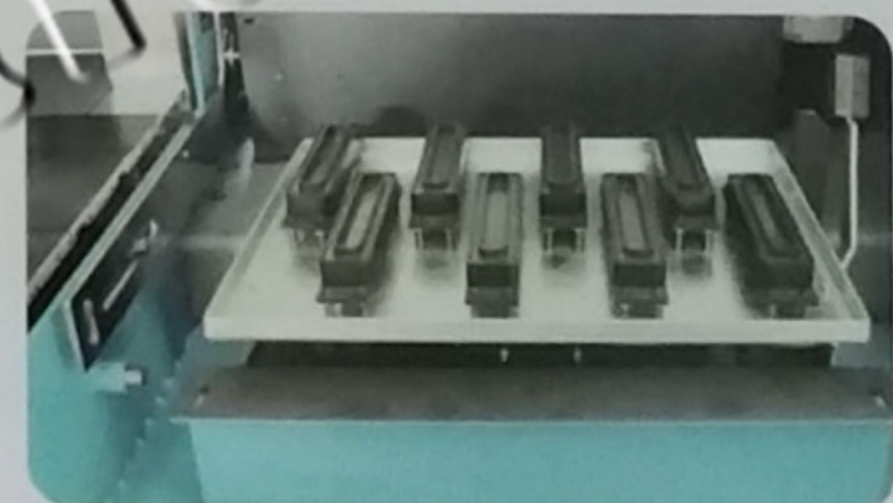

Semi auto-capping for easy moisturizing



Smart feeding system with tension control.



Drying system: 10 cooling fans plus IR heater dry printing quickly;



Operation system: individual control unit for stable operation and easy maintenance;